



## SPECIFICATION SHEET

Ultramatic Model SVB3.5VT Vibratory Deburring and Finishing Bowl Machine. Specified and described below. Wet or Dry applications.

SPECIFICATIONS	
Bowl Diameter	33 1/2
Channel Width	11
Capacity	3.5 Cu. Ft.
Load Capacity	600 Lbs.
Machine Height	38"
Machine Length	36"
Machine Width	34"
Shipping Weight	950 Lbs.
Lining: 80 Durometer	3/4 "
Input Voltage	110/1/60
Drive Unit: 2 HP	1800 Rpm
Specifications subject to change	



SVB3.5VT with Part Unload, Variable Speed Drive, Timer Switch with corded plug Included with Machine

## STANDARD FEATURES


- CAST PREMIUM POLYURETHANE LINING
- DIRECT DRIVE MOTOR W/ ADJUSTABLE WEIGHTS
- HEAVY DUTY STEEL PLATE FABRICATED BOWL AND BASE
- URETHANE MOUNTED COIL SPRING SUSPENSION
- AC VARIABLE SPEED DRIVE W/ DIGITAL DISPLAY
- 110 VOLT TIMER SWITCH WITH CORDED PLUG (STAND MOUNTED)
- PAINT: TWILIGHT GRAY INDUSTRIAL ENAMEL
- BUILT IN PARTS UNLOAD SYSTEM (MANUAL)
- LARGE REMOVABLE HDPE SCREEN
- DISCHARGE DOOR AND REMOVABLE DRAIN
- SOLUTION INPUT VALVE
- LUBRICATED FOR LIFE MOTOR
- RECEPTACLE FOR SOLUTION PUMP
- 1 YEAR WARRANTY



Includes parts unload system, screen and plug door. Wet or Dry operation

### ADDITIONAL STANDARD FEATURES

**DIRECT DRIVE SERIES** - features a Heavy Duty Vibratory Motor with easily adjustable weights. This unique design feature eliminates belts and pulleys and supplies 100 % power to the Tub. Requires 50% less HP resulting in huge electrical operation cost savings. Lubricated for Life

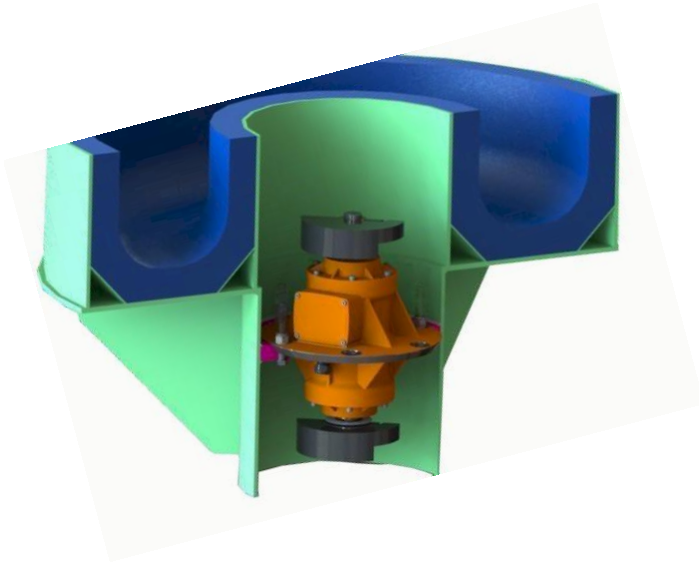

Adjustable Flywheels  
and Weights

110v VFD PACKAGE includes Variable Speed Drive, Timer, pump receptacle with Corded Plug mounted on a stand.



**OPTIONAL EQUIPMENT AND SUPPLIES**

ST15FS Filtration System ▪ Includes 15 Gallon Tank with Cover, weirs, Filter Bag & 110-volt Recirculation Pump. Polyethylene Tank ID is 22.5" L x 17.5" W x 12" High.



We manufacture ceramic and plastic media and liquid compounds.