



SPECIFICATION SHEET

Ultramatic Model VB1VT Vibratory Deburring and Finishing Bowl Machine. Specified and described below. Wet or Dry applications.

SPECIFICATIONS	
Bowl Diameter	22 1/4
Channel Width	8 1/4
Process Capacity	1
Load Capacity	200 Lbs.
Machine Height	32"
Machine Length	24"
Machine Width	24"
Shipping Weight	325 Lbs.
Lining: 80 Durometer	3/8 "
Input Voltage	110/1/60
Drive Unit: 1.7 HP	1800 Rpm
Specifications subject to change	




VB1 with Variable Speed Drive, On Off Timer Switch with corded plug Included with Machine

STANDARD FEATURES

- CAST PREMIUM POLYURETHANE LINING
- DIRECT DRIVE MOTOR W/ ADJUSTABLE WEIGHTS
- HEAVY DUTY STEEL PLATE FABRICATED BOWL AND BASE
- URETHANE MOUNTED COIL SPRING SUSPENSION
- AC VARIABLE SPEED DRIVE W/ DIGITAL DISPLAY
- 110 VOLT TIMER SWITCH WITH CORDED PLUG STAND
- DISCHARGE DOOR AND REMOVABLE DRAIN
- LUBRICATED FOR LIFE MOTOR
- SOLUTION INPUT VALVE
- RECEPTACLE FOR SOLUTION PUMP
- PAINT: TWILIGHT GRAY INDUSTRIAL ENAMEL
- 1 YEAR WARRANTY

ADDITIONAL STANDARD FEATURES

DIRECT DRIVE SERIES - features a Heavy Duty Vibratory Motor with easily adjustable weights. This unique design feature eliminates belts and pulleys and supplies 100 % power to the Tub. Requires 50% less HP resulting in huge electrical operation cost savings. Lubricated for Life

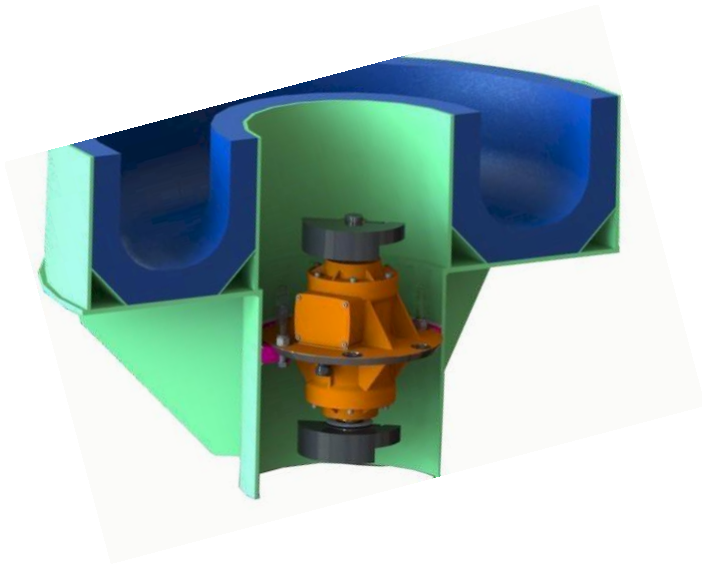

110v VFD PACKAGE includes Variable Speed Drive, Timer, pump receptacle with Corded Plug mounted on a stand.



7 gal tank with baffle and pump