



## SPECIFICATION SHEET

Ultramatic Model VBS-10P Vibratory Deburring and Finishing Bowl Machine. Specified and described below. [Wet or Dry applications.](#)

SPECIFICATIONS	
Bowl Diameter	54
Channel Width	11
Total Capacity	10 Cu. Ft.
Load Capacity	2500 Lbs.
Machine Height	38
Machine Length	48"
Machine Width	48 "
Shipping Weight	1500 Lbs.
Lining: 80 Durometer	1 "
Input Voltage	230 / 460
Drive Unit: 4 HP	1800 Rpm
Specifications subject to change	



## STANDARD FEATURES


- CAST PREMIUM POLYURETHANE LINING
- DIRECT DRIVE MOTOR W/ ADJUSTABLE WEIGHTS
- HEAVY DUTY STEEL PLATE FABRICATED BOWL AND BASE
- URETHANE MOUNTED COIL SPRING SUSPENSION
- CONTROL PANEL WITH TIMER STAND MOUNTED
- PAINT: TWILIGHT GRAY INDUSTRIAL ENAMEL
- BUILT IN PARTS UNLOAD SYSTEM (MANUAL)
- LARGE REMOVABLE SCREEN
- DISCHARGE DOOR AND REMOVABLE DRAIN
- SOLUTION INPUT VALVE
- RECEPTACLE FOR SOLUTION PUMP
- 1 YEAR WARRANTY

### ADDITIONAL STANDARD FEATURES



Includes parts unload system, screen and plug door. Wet or Dry operation

**DIRECT DRIVE SERIES** - features a Heavy Duty Vibratory Motor with easily adjustable weights. This unique design feature eliminates belts and pulleys and supplies 100 % power to the Tub. Requires 50% less HP resulting in huge electrical operation cost savings.

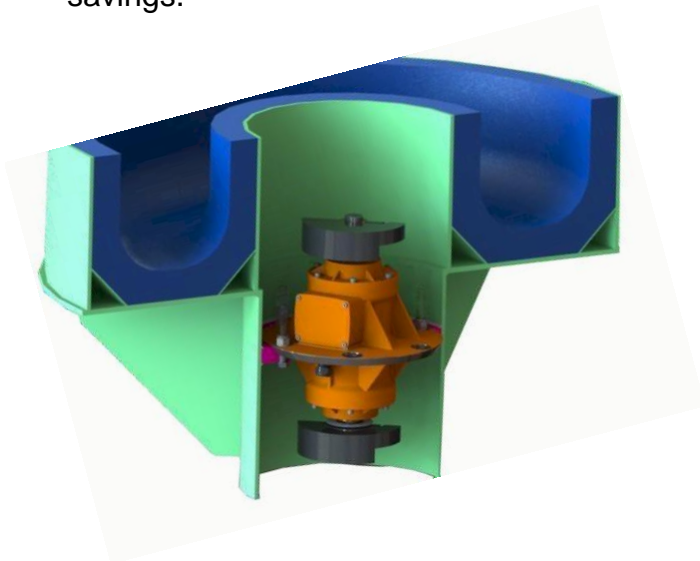



Dial In Adjustable  
Flywheels and  
Weights

**CONTROL PANEL WITH PROCESS TIMER FOR 3 PHASE MACHINE** ▪ includes U.L. listed components housed in a Nema type 12 enclosure. 230 or 460 volts, 3 phase voltage is transformed to 110 volts at operator controls. Includes process timer , hour meter and receptacle for compound pump. Fused disconnect by Customer. (Can Be wall Mounted)



### OPTIONAL EQUIPMENT AND SUPPLIES

ST50FS Recirculation Filtration System ▪ Includes 50 Gallon Tank , weirs, submersible pump and Filter Bag. Tank is 40" L x 24" W x 16" High, with 2 ½ NPT outlet port.  
PRICE .....\$



We manufacture ceramic and plastic media and liquid compounds.