



## SPECIFICATION SHEET

Ultramatic Model VBS-2V Vibratory Deburring and Finishing Bowl Machine with parts separation. Specified and described below. [Wet or Dry applications.](#)

SPECIFICATIONS	
Bowl Diameter	30
Channel Width	8 3/4 "
Total Capacity	2Cu. Ft.
Load Capacity	500 Lbs.
Machine Height	27 1/2"
Machine Length	30"
Machine Width	30"
Shipping Weight	600 Lbs.
Lining: 80 Durometer	3/4 "
Input Voltage	110/1/60
Drive Unit: 1.5 HP	1800 Rpm
Specifications subject to change	



## STANDARD FEATURES


- CAST PREMIUM POLYURETHANE LINING
- DIRECT DRIVE MOTOR W/ ADJUSTABLE WEIGHTS
- HEAVY DUTY STEEL FABRICATED BOWL AND BASE
- URETHANE MOUNTED COIL SPRING SUSPENSION
- AC VARIABLE SPEED DRIVE WITH 110V CORDED PLUG
- PAINT: TWILIGHT GRAY INDUSTRIAL ENAMEL
- PARTS UNLOAD SYSTEM (MANUAL)
- LARGE REMOVABLE SCREEN
- DISCHARGE DOOR AND REMOVABLE DRAIN
- SOLUTION INPUT VALVE
- SOLUTION PUMP AND TANK
- 1 YEAR WARRANTY

### ADDITIONAL STANDARD FEATURES



Includes parts unload system,  
drop in ramp and screen deck

**DIRECT DRIVE SERIES** • features a Heavy Duty Vibratory Motor with easily adjustable weights. This unique design feature eliminates belts and pulleys and supplies 100 % power to the Tub. Requires 50% less HP resulting in huge electrical operation cost savings.

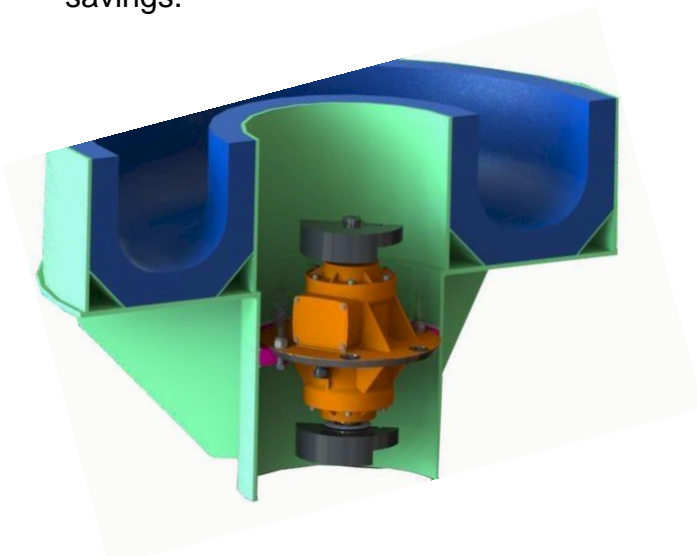



110 Volt ▪ Variable Frequency Drive  
includes Corded Plug  
This standard feature provides on the fly  
precise finishing adjustments

Mountable on wall or Machine Base



Solution Pump and  
7 Gallon Tank

### OPTIONAL EQUIPMENT AND SUPPLIES



We manufacture ceramic and plastic media and liquid compounds. Save when bundling media purchase with Machine Order

110 VOLT Timer Control ▪ Includes process timer , two outlets for the vibratory machine and solution pump and corded plug.



ST15FS Filtration System ▪ Includes 15 Gallon Tank with Cover, weirs, Filter Bag & 110-volt Recirculation Pump. Polyethylene Tank ID is 22.5" L x 17.5" W x 12" High.

