



ULTRAMATIC EQUIPMENT CO.

Vibratory Finishing Equipment Technology Since 1959



Made in the USA

Ultramatic Model **P6 SE** Vibratory Deburring and Finishing Machine, steel fabricated heavy-duty construction specified and described below.

Direct Drive Series features a Heavy-Duty Vibratory Motor with easily adjustable weights. This unique design feature eliminates belts and pulleys and supplies 100 % power to the Tub. Requires 50% less HP resulting in huge electrical operation cost savings and low decibel levels of 80dB.¹

SPECIFICATIONS	
Tub Length Inside after lining	35"
Tub Width Inside after lining	18.5"
Total Capacity	6 Cu Ft
Machine Height	42"
Machine Length	45"
Machine Width	34"
Shipping Weight	950 Lbs.
Lining: 80 Durometer	3/4 "
Input Voltage	110
Drive Unit Centrifugal Force : 1570 lbs.	1800 Rpm
Specifications subject to change	




STANDARD FEATURES

HIGH SPEED DIRECT DRIVE (OFFSET) FOR SUPERIOR FINISHING POWER	PREMIUM CAST POLYURETHANE LINING
SUPER QUIET FOAM LINED METAL BASE WITH HINGED SOUND COVER	MEDIA DISCHARGE DOOR
AC VARIABLE SPEED DRIVE W/ DIGITAL DISPLAY	REMOVABLE DRAIN WITH HOSE
110 VOLT TIMER SWITCH & RECEPTACLE W/ CORDED PLUG	ADJUSTABLE AMPLITUDE
COIL SPRING SUSPENSION WITH URETHANE MOUNTS	COMPOUND SPRAY PIPING
LUBRICATED FOR LIFE	RECIRCULATION PUMP AND TANK
PAINT: BLACK INDUSTRIAL ENAMEL / TWILIGHT GRAY	ONE YEAR WARRANTY

P6 SE STANDARD FEATURES CONTINUED

110 VOLT • VARIABLE FREQUENCY SPEED DRIVE / TIMER:
for push button adjustments to the vibration frequency. Includes 110-volt on off timer, corded plug and receptacle, stand mounted. VFD Digital readout is adjustable to 1800 RPM.

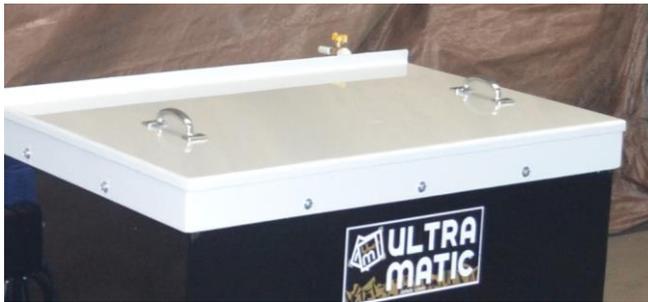

Hinged Sound Reduction Cover and Cabinet are foam lined for super quiet operation.



High Speed Direct Drive Motor , Adjustable Flywheels and Weights Lubricated for Life



Solution tank and 110 volt pump